


6448 Foot Bellows

herga

Technology Ltd

- Low profile, easy to operate foot bellows
- For free standing applications or secured with a built in mounting
- Available as twin foot bellows (see 6447) and with convex top and base
- Baseplate material - rigid polymer
- Bellows material - flexible polymer

Reference dimensions mm

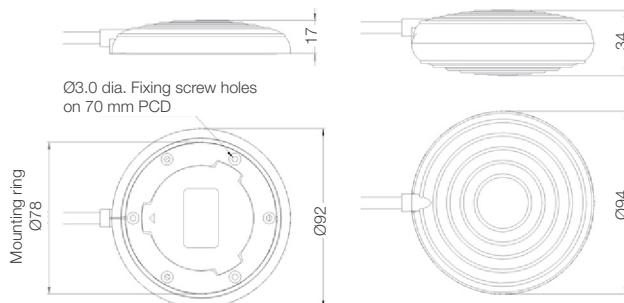

Ø3.0 dia. Fixing screw holes
on 70 mm PCD



New base option
• please contact sales
for more information

Note: To remove mounting ring from bellows as supplied, insert a 3 mm dia. bar in one of the holes & twist anti-clockwise through 41°. Mounting ring can be used as a template for drilling/tapping holes in mounting face.

Ordering and options

Stock model: 6448-AAAB-0000

6448 - -

Model

Tube entry

- A Side tube entry, flat base with mounting ring
- B Side tube entry, flat base without mounting ring
- C Back entry spout, flat base with mounting ring
- D Back entry spout, flat base without mounting ring
- E Side tube entry, flexible base (double volume)

Colour option

A Black	D Red
B Grey	F Green
C White	

Tube type

- A Black tubing with 3mm I/D and 6mm O/D
- B Clear tubing with 3mm I/D and 6mm O/D
- C Black tubing with 1.5mm I/D and 3mm O/D
- Z None required

Tube length

A 1.5m	E 5m
B 2m	F 6m
C 3m	G Curly coil tube (2.4M ext.)
D 4m	Z None supplied

Note:

To remove mounting ring from bellows as supplied, insert a 3.0mm bar in one of the holes and twist anti-clockwise through 41°. Mounting ring can be used as a template for drilling/tapping holes in mounting face.

General specifications

Standards/approvals n/a

Operating temperature range -10°C to +40°C

Degree of protection EN 60529 IPX4

Body material Thermoplastic

Connection method Tubing 3mm I/D or 1.5mm I/D (back entry only)

Weight 0.1kg

Accessories

Part Number	Description
6202-0001	Single Black RAL 9005 guard
6202-0002	Single Grey RAL 7035 guard
6202-0003	Twin Grey RAL 7035 guard



With 6202 Guard



Herba Technology Ltd - Northern Way - Bury St. Edmunds - Suffolk - IP32 6NN - UK
sales@herga.com • www.herga.com • +44 (0)1284 701422

Subject to change without notice