

6219 Industrial Footswitch


herga

Technology Ltd

For IPX7 single pole switching

- Economic/versatile plastic switch designed to reduce operator fatigue
- Pneumatic version available, please refer to Airswitching section for details
- Ideal for repetitive use with office equipment, domestic/medical appliances and general industrial applications
- Increased temperature range of -20 to +80°C

Reference dimensions

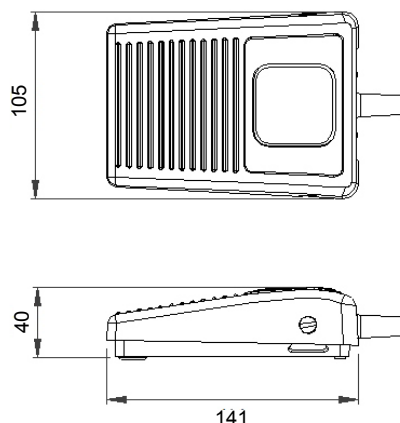

General specifications

Standards/approvals	Footswitch: low voltage directive 2014/35/EU, EN 60950 Microswitch: EN 61058-2-1, EN 61058
Degree of protection	EN 60529 IPX7
Connection method	2M of black cable with stripped cable cores
Electrical rating	Max.3A 250V AC/DC
Contact configuration	SPCO

Operating temperature range	-20°C to +80°C
Body material	Thermoplastic
Weight	0.375Kg
Additional information	Customised versions available (Logo's, Guards etc.)

6219: Ordering and options

6219 - ☐ Z ☐ B ☐ - Z ☐ B ZZ - 0 0 0

Model

Cover

- A Black
- B Grey

Switching action

- B Single pole change over microswitch (CC)

Electrical rating

- A Gold contacts 0.1A 24V AC/DC
- B Silver contacts 3A 250V AC/DC

Cable

- B 2 m black cable

Special attributes

001 through 999 indicates special attributes


Votre distributeur agréé HERGA en France
6 rue de la Prévôté
78550 HOUDAN

☎ 01 34 85 54 68

🌐 <https://pitch-technologies.fr>
✉ info@pitch-technologies.fr

Accessories

Part Number	Description
6202-0001	Single Black RAL 9005 guard
6202-0002	Single Grey RAL 7035 guard
6202-0003	Twin Grey RAL 7035 guard



With 6202 Guard



PITCH TECHNOLOGIES

Herga Technology Ltd - Northern Way - Bury St. Edmunds - Suffolk - IP32 6NN - UK
sales@herga.com • www.herga.com • +44 (0)1284 701422

Subject to change without notice