

6228 Foot Switches




Technology Ltd

For IPX7/IPX8 single & double pole switching

- Low profile, rear hinged switch designed for improved user comfort
- All plastic construction with raised tread pattern and anti-slip pad
- Versatile and innovative design make it an ideal product for OEM use
- Switches designed to meet industrial, office and commercial standards
- Option for customers to fit own cable



Reference dimensions mm

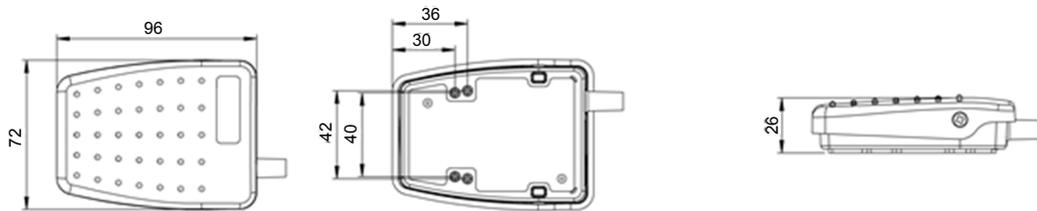

M3 Brass fixing inserts
Bottom holes as standard

General specifications

Standards/approvals	n/a	Operating temperature range	-20° C to + 80° C
Degree of protection	EN 60529 IPX7 (IPX8 upon request)	Body material	Thermoplastic
Connection method	Stripped cable cores or connector of your choice	Weight	0.14Kg (including cable)
Electrical rating	Max. 3A 250V AC/DC	Additional information	Customized versions available (logos, cordsets, colours, guards)
Contact configuration	SPST N/O, SPST N/C, SPCO, DPST N/O, DPST N/C, DPCO		



PITCH TECHNOLOGIES

Votre distributeur HERGA en France
 6 rue de la Prévôté
 78550 HOUDAN
 ☎ 01 34 85 54 68
 🌐 <https://pitch-technologies.fr>
 ✉ info@pitch-technologies.fr



Subject to change without notice

6228 Foot Switches



Technology Ltd

For IPX7/IPX8 single & double pole switching

Ordering and options

6228 - [] [] [] [] - [] [] [] [] - 0 0 0

Model

Cover & base colours

- | | | | |
|---|---------------------------|---|---------------------------|
| A | Black cover & Black base | E | Red cover & Black base |
| B | Grey cover & Black base | L | Blue cover & Black base |
| C | Yellow cover & Black base | N | Orange cover & Black base |
| D | Green cover & Black base | | |

Base configuration

- A Base fitted with M3 brass inserts
- B Base fitted with Neoprene pad
- C Base fitted with M3 brass inserts & Neoprene pad
- D Base fitted with Anti-slip Feet

Switching action

- A Single pole normally open (SC)
- B Single pole change over (CC)
- C Double pole normally open (DO)
- D Double pole normally open, Two stage (DA)

Electrical rating

- A Microswitch (Max. rating 0.1A, 24 V AC/DC)
- B Microswitch (Max. rating 3A, 250 V AC/DC)

2-core cable at 2m length

- B Cable 2-core Black
- Z No cable chosen

3-core cable at 2m length

- B Cable 3-core Black
- Z No cable chosen

4-core cable at 2m length

- B Cable 4-core Black
- Z No cable chosen

Non cable variants - microswitch flying leads only

- A Microswitch change over - fitted with flying leads 450mm long (Max. rating 3A, 250V AC/DC)
- Z No option chosen

Special attributes

000 indicates no special attribute option chosen (product as standard matrix)
001 through 999 indicates special attributes

Note : Examples: Customer specified cable/cordset with or without plug
Cable length variation if different from 2m
Customer specified identification and label combination
Guard or special base

Accessories

Part Number	Description
6202-0001	Single Black RAL 9005 guard
6202-0002	Single Grey RAL 7035 guard
6202-0003	Twin Grey RAL 7035 guard



With 6202 Guard

PITCH TECHNOLOGIES

Votre distributeur HERGA en France
6 rue de la Prévôté
78550 HOUDAN



01 34 85 54 68
<https://pitch-technologies.fr>
info@pitch-technologies.fr

Herga Technology Ltd - Northern Way - Bury St. Edmunds - Suffolk - IP32 6NN - UK
sales@herga.com • www.herga.com • +44 (0)1284 701422

Subject to change without notice